


Ball caster / ball units rails



Designation	Type of ball caster	Division	Begin	Profile	Length	Surface
KRS	X	Y	V	U	Z	W
SAMPLE	015.000	075	050	30 x 30	1000	RAL ...
-	possible ball caster 015.xxx / 022.xxx	Free selectable	Free selectable	30x30 or 50x50	Free selectable up to 6.000	galvanized or RAL

Rail tolerances according to ISO2768-1-v

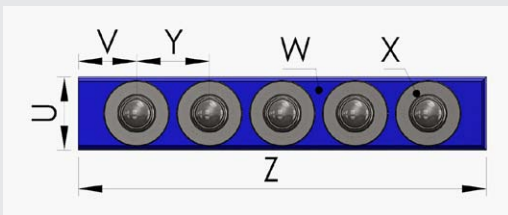

On request, we supply ball caster rails / ball transfer units rails adapted to your individual requirements.

We usually use rectangular section tubes with 2-4mm thick walls.

The tubes are galvanised in the standard procedure, but can also be supplied with powder-coated surfaces in different RAL colours.

Ball caster spacing patterns can be carried out in accordance with the collar size of the ball casters used. We supply profile lengths of up to maximum 6,000 mm.

The ball casters / ball units are mounted by means of press fitting and are easily replaceable.

So you'd like to "get something special rolling", but have questions about it!?

Please don't hesitate to contact us in person or to use our contact form – we're always happy to advise you!